

## DYNAMIS

### LEAD-LINE 7-12S

Rechargeable Sealed Lead-Acid Battery



#### Specification

**Nominal Voltage (V)** 12V

**Nominal Capacity**

20 hour rate ( 0,35A to 10,50V)	7,0Ah
10 hour rate ( 0,70A to 10,50V)	6,6Ah
5 hour rate ( 1,4A to 10,20V)	6,0Ah
1C ( 7,0A to 9,60V)	3,8Ah
3C ( 21,0A to 9,60V)	2,7Ah

**Weight** ca. 2,25 kg

**Internal Resistance (at 1kHz)** 21 mΩ

**Maximum Discharge Current for 30 seconds:** 100A

**Maximum Discharge Current for 5 seconds:** 288A

**Operating Temperature Range**

Charge	0°C to 40°C
Discharge	-15°C to 50°C
Storage	-15°C to 40°C

**Charge Retention (shelf life) at 20°C**

1 month	92%
3 month	90%
6 month	80%

**Charging Methods at 25°C**

**Cycle use:**

Charging Voltage 14,4 to 15,0V  
Maximum Charging Current: 2,10A

**Standby use:**

Float Charging Voltage 13,50 to 13,80V

**Life expectancy:**

**Cycle Use:**


100% depth of discharge 200 cycles  
80% depth of discharge 225 cycles  
50% depth of discharge 500 cycles

**Standby Use:** 3 ~ 5 years

**Case Material:** ABS

(Option: 94-HB & 94V-0 flame retardant case)


**Terminal Type:** S

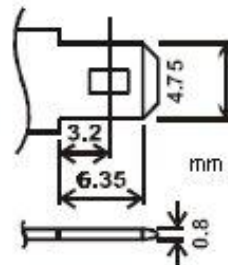

S-pole

Order no. 60.05025

Certified according to UL.

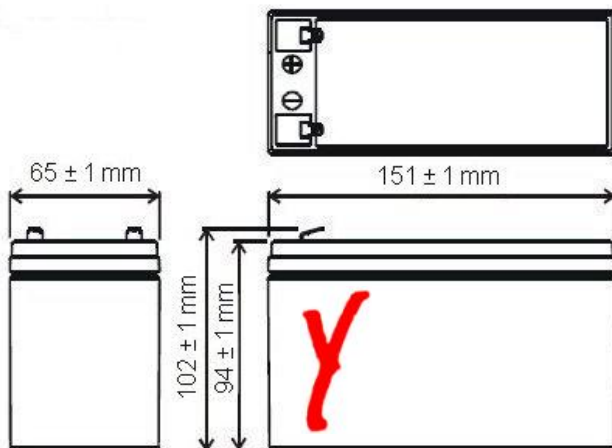

G114054

